

Talk **PRO**[™]

X-10

**ANALOG
TWO-WAY
RADIO**

Recommended For

- Railways (General Purpose)
- Shops
- Construction Sites
- Security Services
- Shop Floors
- Spots, Events
- Wedding Planners
- Videographers




Talk **PRO X-10** is a cost-effective analog two-way radio designed for the **Indian marketplace**. Delightfully small and compact, with a comprehensive analog feature kit that includes **Squelch Levels, Auto Power Save, Low Battery Alert, Monitor, BCL, TOT and CTCSS/CDCSS**, this walkie talkie is curated to deliver convenience and efficiency at a **budget friendly pricetag**.

Talk **PRO**[™]
X-10

MAIN FEATURES



Auto Power Save



Squelch Levels



Anti-Slip Design



Low Battery Voice Alert



MIL - STD - 810

Ingress Protection Class IP54

**VOX (Voice Operated Switch)
for handsfree operations**

Water Resistant


**Unconditional Replacement Warranty
of 2 years on radio and
1 year on accessories (battery & charger)**

Talk PRO™ X-10



Port for handsfree
accessory connector

Battery Lock

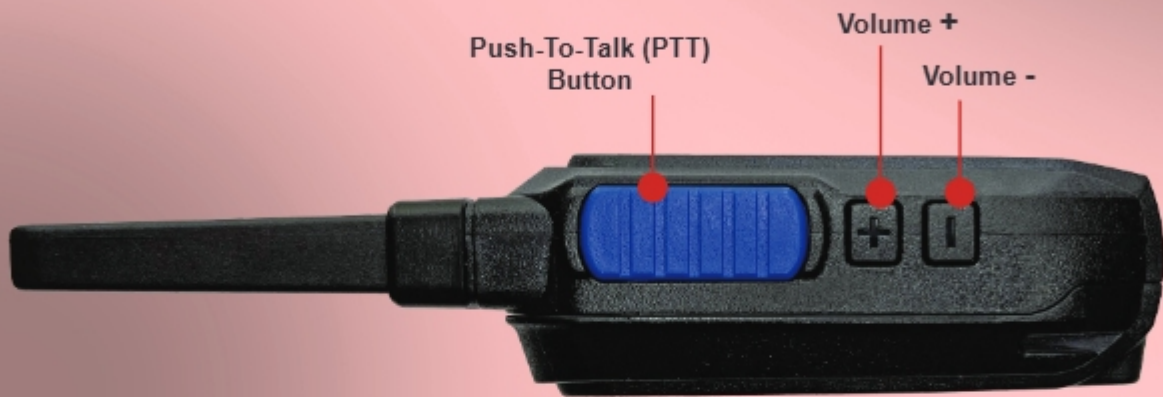

Push-To-Talk (PTT)
Button

Volume +

Volume -



Fail-proof Rugged
Antenna Design

Charging Port

Monitor Button
Enables weak signals
to be heard clearly

General Features

- 446MHz License Free Band
- With Govt. Equipment Type Approval (ETA)
- BIS Certification Battery
- 48 hours Talk Time
- Battery Life of Over 2 years
- Range of 2kms
- 750 mW Speaker for Loud Audio
- Easy Fit Radio Holster



SPECIFICATIONS

Talk *PRO*[™] X-10

General

Frequency Range	UHF:446-446.2MHz
Channel Capacity	16
Channel Spacing	25KHz/12.5KHz
Operating Temperature	-20°C~+60°C
Antenna Impedance	50Ω
Operating Voltage	DC 3.7V(±20%)
Battery Capacity	2300 mAh
Frequency Stability	≤ ± 2.5ppm
Dimensions	58(L)*33.5(W)*155(H)mm
Weight	141g(including battery pack)

Transmitter

Power Output	0.5W
Modulation	11KøF3E/16KøF3E
Rated Audio Distortion	≤ 5%
Adjacent Power	60dB
Modulation Limitation	≤ 5KHz(Wide)/2.5KHz(Narrow)

Receiver

Audio Output	0.5W
Sensitivity	≤ -123dBm (12dB SINAD)
Adjacent Selectivity	≥ 60dB(Wide)/55dB(Narrow)
Intermodulation Rejection Ratio	≥ 60dB(Wide)/55dB(Narrow)
Spurious Suppression	≥ 60dB(Wide)/55dB(Narrow)
Rated Audio Output Power	750mW
Rated Audio Distortion	≤5%



ACCESSORIES

Standard Accessories



Adaptor



USB Cable



Belt Clip



Battery



Hand Strap

Manufactured by

ICONET SERVICES
102, Spur Tank Road,
Chetpet, Chennai 600031
Ph : 044-4280 9000/4280 9100
email : enquiry@talkpro.in
website : www.talkpro.in